


Revesorb-FT24 is a low density polyurethane flexible foam containing a flame retardant additive to reduce ease of ignition used for acoustic absorption application.

Revesorb-FT24	
Nominal piece density range Kg/m ³	23-25
Nominal hardness range newtons	70-100
Thermal conductivity W/mK	0.037
Flammability	FMVSS 302 (self extinguishing) & UL94 HF1
Format	
Colour	GREY

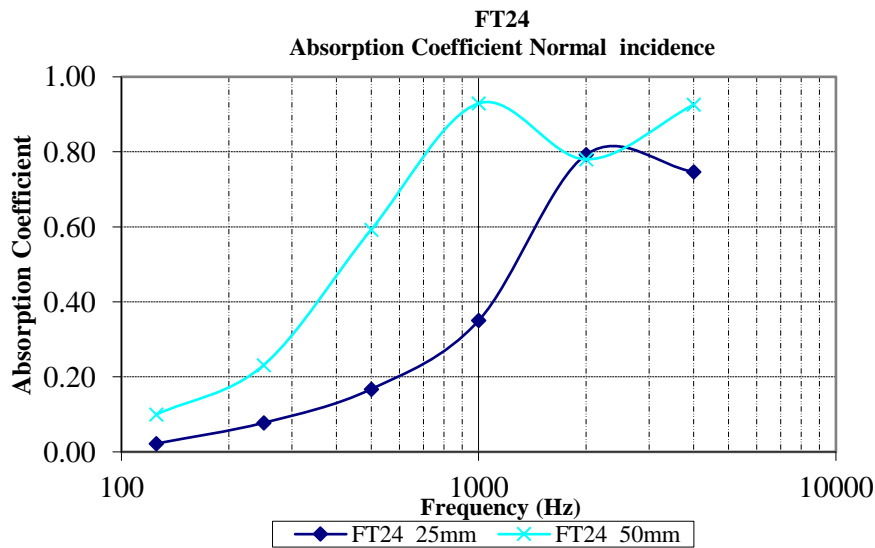

Available Range:

- Revesorb-FT24-AD (self adhesive backed)
- Revesorb-FT24-PU2(MELT) (with a polyurethane film facing)
- Revesorb-FT24-PU2(MELT)-AD (self adhesive backed with polyurethane film facing)